
# **PCI-1762**

# 16-ch Relay and 16-ch Isolated Digital **Input PCI Card**

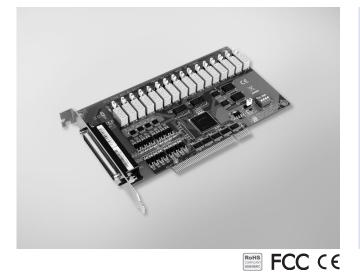

## Features

- 16 opto-isolated digital input channels
- 16 relay actuator output channels
- LED indicators to show activated relays •
- Jumper selectable dry contact/wet contact input signals
- BoardID switch

# Introduction

The PCI-1762 provides 16 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 16 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

# **Specifications**

#### **Isolated Digital Input**

- Channels
- Input Voltage
  - Logic 1: 10 V min. (50 V max.)

Logic 0: 3.0 V max.

16

- Interrupt Capable Ch. 2 (IDI0,IDI8)
- Isolation Protection 2.500 Vpc
- Opto-Isolator Response 100 µs 5.7 k Ohm 1 W
- Input Resistance

#### **Relay Output**

- Channels
- 16 Relay Type Form A or Form B (Jumper selectable)
- Contact Rating 0.5 A @ 250 V<sub>AC</sub>, 0.5 A @ 30 V<sub>DC</sub>
- Max. Switching Power 125 VA, 15 W
- Max. Switching Voltage 250 V<sub>AC</sub>, 220 V<sub>DC</sub> Typical: 3 ms, Max.: 5 ms
- Operate Time
- Release Time Typical: 2 ms, Max.: 4 ms Contact: 50 m Ohm max.
- Resistance
- 2 x 105 cycles min. @ 0.5A/ 250V<sub>AC</sub> Life Expectancy

### General

- I/O Connectors
- Dimensions (L x H)
- Power Consumption
  - Typical: 5 V @ 250 mA Max.: 5 V @ 620 mA
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity 5 ~ 95 % RH, non-condensing

# **Ordering Information**

- PCI-1762
- 16-ch Relay and 16-ch Isolated Digital Input PCI Card

1 x DB62 female connector

175 x 100 mm (6.9" x 3.9")

DB62 DIN-rail Wiring Board

## Accessories

- PCL-10162-3E
- ADAM-3962

KOLBINGER - PCQT-+43 2239 3160AT-2384 Breitenfurt/Vienna, Hauptstrasse 93, office@kolbinger.at , www.pcqt.at

PCL-10162-1E DB62 Cable, 1 m DB62 Cable, 3 m